


USER MANUAL

PCM FLASH ACTIVATION FOR THE PREAMACTIVATED DONGLE

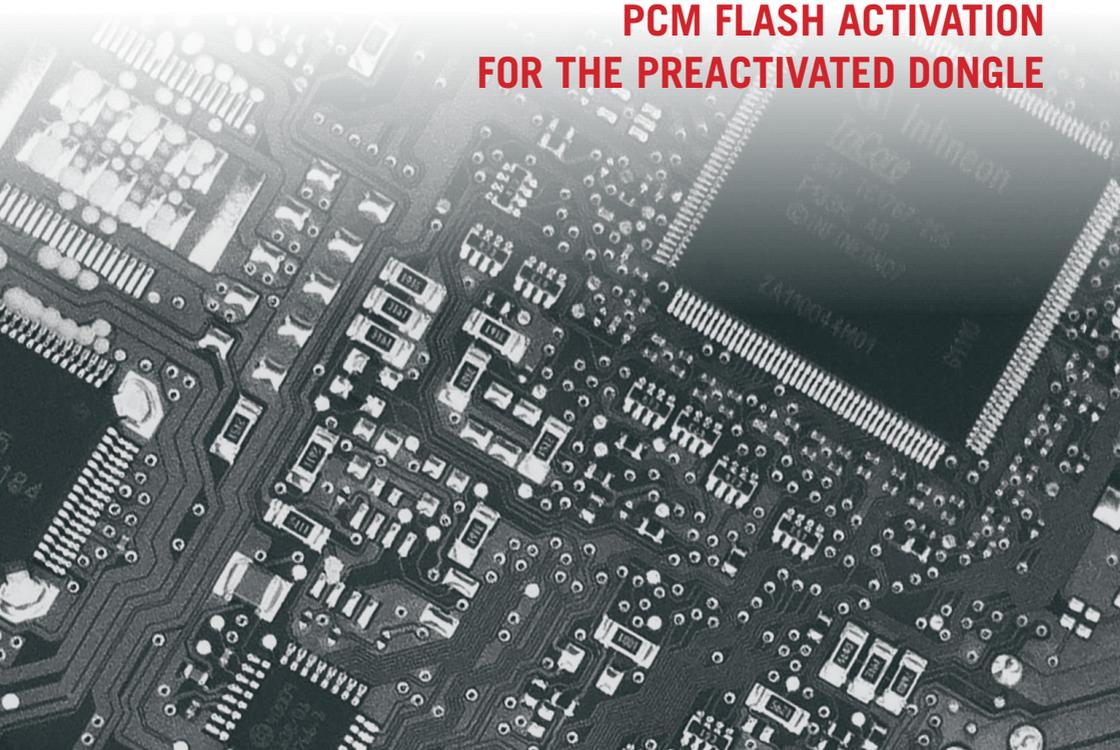

Sedox Performance AS

Knud Holms gate 1

4005 Stavanger

Norway

tel.: +47 90 91 65 85

email: support@sedox.com

www.tuningfiles.com

1. Introduction - About the key

The electronic dongle key is a device designed to protect applications and data from unauthorized use and replication.

Attention! Built-in protection is controlled by the checking references to the key and can block it in the event of unauthorized access attempts. In this case, the claim for the key and the program will not be accepted.

Protect the electronic key from mechanical influences (fall, shaking, vibration, etc.), the impact of high and low temperatures, corrosive environments, high voltage, any liquids; all can lead to the malfunction of the key.

Do not use excessive force when the dongle is connected to the computer and the peripheral device to the dongle.

Do not disassemble the electronic key. This can lead to breakage of its body, as well as damage to or breakage of printed circuit elements, and as a result - in unreliable operation or failure of the device. In the case of failure or malfunction of the electronic key, you should refer to the seller.

The permissible ambient temperature during operation of electronic keys is from 0 to +45 ° C. Relative humidity should be between 0 and 100% non-condensing. Do not use an electronic key, a cooled during transportation or storage of up to negative temperatures, before it warms up to room temperature, which ensures that there is no condensation,

All electronic keys are designed to operate in an air environment and placing them in different media (water, oil, etc.) are not allowed. The device is not intended for use in highly contaminated environments (dry and wet dust, dirt, the oily and high content of active substances in the air). Do not expose the dongle (especially connectors) to dust, dirt, moisture, any liquids and so on. To clean the housing and connectors, use a dry cloth. The use of organic solvents is unacceptable.

2. Software Licenses and Activations.

Your PCM Flash USB Dongle has been preactivated by Sedox Performance. You only have to install drivers for the PCM Flash dongle and your Openport OBD interface and insert activation codes for the purchased plugins!

Attention! Guardant driver has to be installed **BEFORE** connecting the USB dongle to the USB port in the PC. If the key has been connected before driver installation, and standard Windows USB-Device Wizard installation has started, you have to remove the key from the port and cancel the wizard.

Please follow the step by step procedure on the following pages.

STEP 1. Installation of the Guardant drivers

1. Download the Guardant driver from: <http://www.guardant.com/support/download/drivers/>, selecting the correct operating system version (32 or 64bit) installed on your PC.
2. Install the drivers
3. If necessary, restart your computer

STEP 2. Installation of the Tactrix drivers

Depending on your OBD Openport interface install correct drivers. This example is for the recommended Tactrix OpenPort interface.

1. Download the Tactrix driver from:
http://www.tactrix.com/downloads/openport2_setup_1024791.exe
2. Install the drivers
3. If necessary, restart your computer

STEP 3. Installation of the PCM Flash Application

Once you have drivers installed you can download PCM Flash application.

1. Download the latest PCM Flash from:
https://drive.google.com/file/d/19_KpSBwmUHxE4_1ACW_0A91xAaVWF9VI/view
2. Unpack the application
3. Connect the dongle
4. Start the PCM flash application

STEP 4: Activating purchased modules


If you want to purchase additional modules you can start on module order.

Go to www.tuningfiles.com and order the module. It is mandatory to enter your dongle hardware ID which can be found either in the PCM Flash software or on the dongle itself (etched on the metal USB connector)

After this we will order the module based on your dongle id, name and email.

If you have purchased modules with the dongle or you have purchased it afterwards you first have to activate purchased module on your USB key.

After purchase you will receive activation code in email. To activate the module open PCM Flash software, click on **[Settings]**, paste activation code into the field and click on **[Activate]** to activate it.

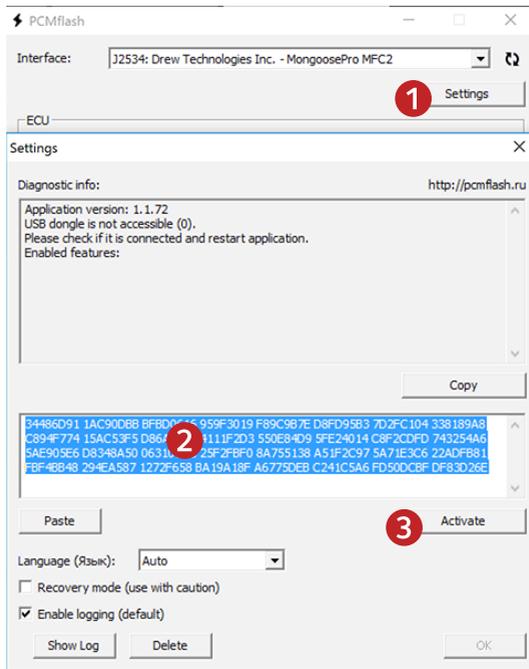

If you need any help feel free to email Sedox Performance support on support@sedox.com



Sedox Performance AS

Knud Holms gate 1
4005 Stavanger
Norway
tel.: +47 90 91 65 85
email: contact@sedox.com

www.tuningfiles.com
www.sedox-performance.com

Technical alterations reserved!

Copyright by Sedox Performance AS and our respective partners!

This product should be operated by competent personnel only.
Sedox Performance AS do not accept any responsibility for damages,
direct or consequential caused by improper handling.